

## How to Select Your Frame Size

### Available Sizes

**3 Wheel** - 7.25", 7.50", 8.25", 8.75", 9.25", 9.75", 10.25"

**4 Wheel** - 9.25", 9.75", 10.25", 10.75", 11.37", 12.12"


1. Measure the distance from heel to toe using a cloth tape.
2. Subtract 1/4" and order that or next smaller size.

Example 1: Boot measures 10-1/4" toe to heel  
(10-1/4" - 1/4" = 10") Order 9.75"


Example 2: Boot measures 9-1/8" toe to heel  
(9-1/8" - 1/4" = 87/8") Order 8.75"

### Pic Frame Installation

1. Center the frame from toe to heel. Attach screws to slotted holes first for easy adjustment, then attach remaining screws when properly positioned.

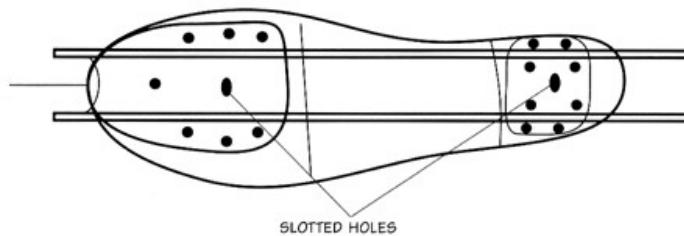


2. The recommended distance of the pick is 1-1/8" forward of the toe.

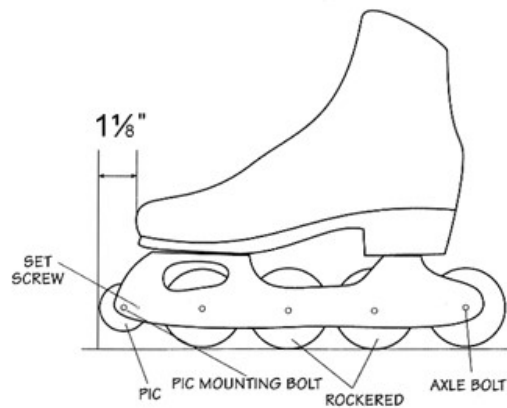

3. The sole of the boot will draw down when attached. The gap between plate and toe is normal.
4. To rotate a worn pick, remove set screws and rotate pick to an unworn surface and reattach set screws.

### Parts Check List

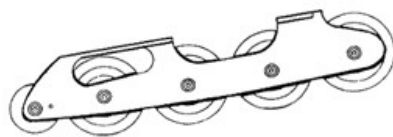

	3 wheels	4 wheels
Pic frames	2	2
T-bushings	12	16
Axle bolts	6	8
Coupling screws	6	8
Allen keys	2	2
Wheels	6	8
Bearings pre-mounted	12	16
Spacers pre-mounted	6	8
Heel plate screws 3/4	8	8
Toe plate screws 1/2	12	12